


OR18 – TX8 1.8M IMPRIMANTE DE SUBLIMATION

 Sublimation & Direct Textile


 **ORIC** 欧瑞卡

OR18-TX8/OR22-TX8

Industrial Dye Sublimation Printer (With 8 Heads)

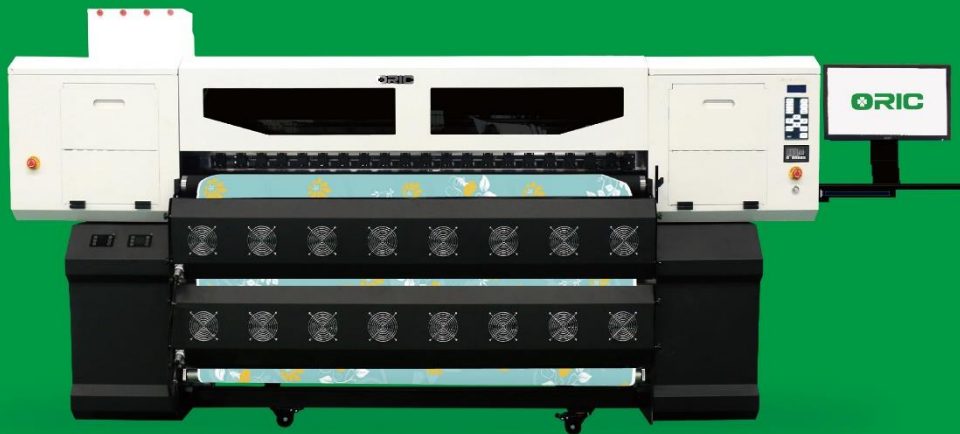

Eight 13200 Heads
CMYK



* 1.8m Eight 13200 Print Heads Speed

360x1200dpi - 1pass	360 m ² /h
360x2400dpi - 2pass	180 m ² /h
360x3600dpi - 3pass	100 m ² /h

** 2.2m Eight 13200 Print Heads Speed


360x1200dpi - 1pass	380 m ² /h
360x2400dpi - 2pass	196 m ² /h
360x3600dpi - 3pass	120 m ² /h

ORIC Sublimation Ink



● Technical Specifications(2m optional)

Model		OR18-TX8	OR22-TX8
Print Head		Eight I3200 Print Heads	
Printing Technology		Piezoelectric Inkjet	
Acceptable Media	Width	72 in.(1830 mm)	87.8 in.(2230 mm)
	Thickness	Maximum 39 mil(1 mm)	
	Maximum Media Load	1000m	
Printing Width		70.8 in.(1800 mm)	86.6 in.(2200 mm)
Ink Cartridges	Type	Dye Sublimation Ink	
	Capacity	4*4 CISS (220ml ink cartridge with 5L ink tank)	
	Color	4 colors (Cyan, Magenta, Yellow, Black)	
Printing Resolution		Maximum 3600 dpi	
Printing Speed		1pass(360x1200dpi): 360 sqm/h	1pass(360x1200dpi): 380 sqm/h
		2pass(360x2400dpi): 180 sqm/h	2pass(360x2400dpi): 196 sqm/h
		3pass(360x3600dpi): 100 sqm/h	3pass(360x3600dpi): 120 sqm/h
Media Heating System		Intergrated post heater & Infrared Dryer & Fan system	
Interface		USB 3.0	
Power Supply		AC 220V ± 10%, 50/60 HZ	
Dimensions(with stand)		133.86(W)x47.24(D)x78.74(H) in.	149.60(W)x47.24(D)x78.74(H) in.
		(3400(W)x1200(D)x2000(H) mm)	(3800(W)x1200(D)x2000(H) mm)
Weight(with stand)		650 kg	750 kg
Package Dimensions		133.86(W)x55.12(D)x86.61(H) in.	157.48(W)x55.12(D)x86.61(H) in.
		(3600(W)x1400(D)x2200(H) mm)	(4000(W)x1400(D)x2200(H) mm)
Package Weight		700 kg	800 kg
Environment	Power on	Temperature: 59 ℉ to 90 ℉ [15℃ to 32℃] / Humidity: 35 to 80% (no condensation)	
	Power off	Temperature: 41 ℉ to 104 ℉ [5℃ to 40℃] / Humidity: 20 to 80% (no condensation)	
Accessories		USB cable, media clamp, manual, drain bottle, ink cartridges, RIP software, etc.	



Double high-precision mute rail.



Stable 5L bulk system ensures amazing printing speed.




Machine cover increases cylinder control, More labor-saving and convenient .



Carriage bottom plate increases double-sided heating.



Honeycomb suction platform ensure the flatness of the paper more effectively when printing .



Junbo media roll maximum 1000m media load.



Inflatable take up and feed media shaft.



Frequency motor ensures more stable material loading and take-up